


NOTES: UNLESS OTHERWISE SPECIFIED


- 1. SEE DRAWING NO. CB-00278 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
- 2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
- 3. DIMENSIONS ARE INCH [MILLIMETER].
- 4. TERMINAL HARDWARE KIT PROVIDED, PART NUMBER 6923.

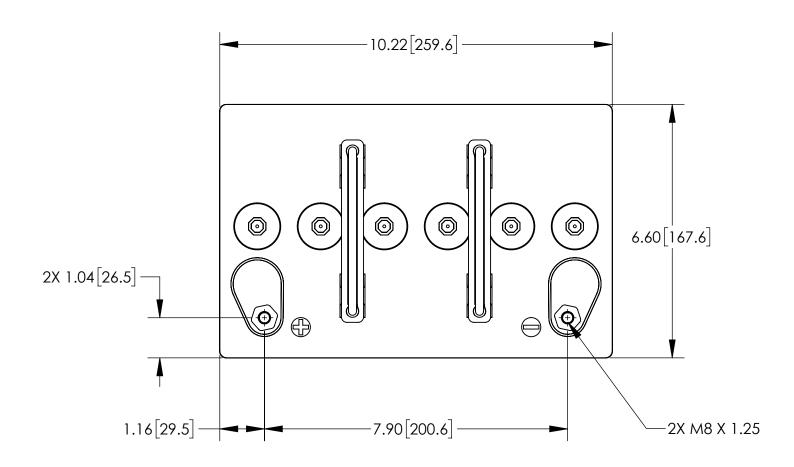

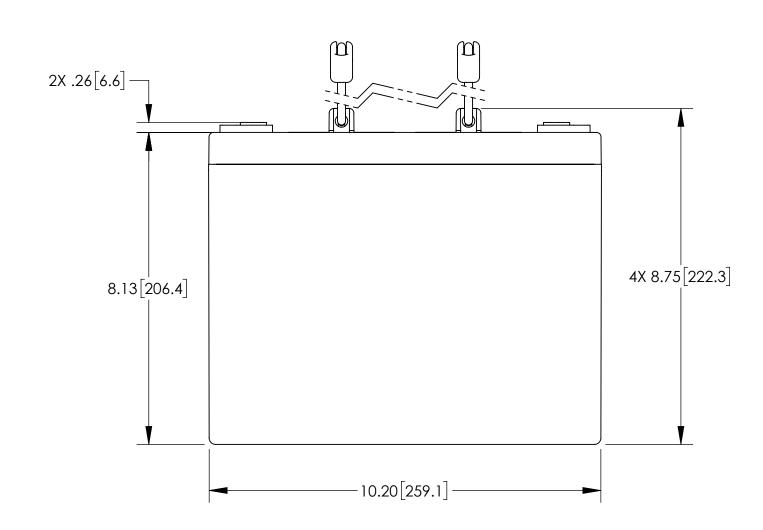


CAPACITY RATINGS									
PART NUMBER	AGM-1265T	AGM-1280T							
NOMINAL WEIGHT	50 LBS [22.7 KG]	56 LBS [25.4 KG]							
AMPERE HOUR CAPACITY @ 20 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	65 AH	80 AH							
MINUTES OF DISCHARGE @ 25 AMPS 1.75 VOLTS/CELL @ 77°F (25°C)	121 MIN	149 MIN							

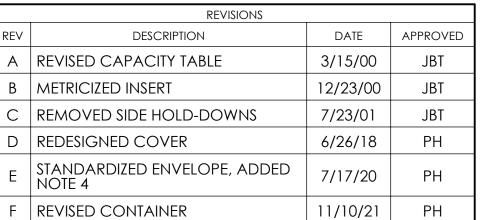

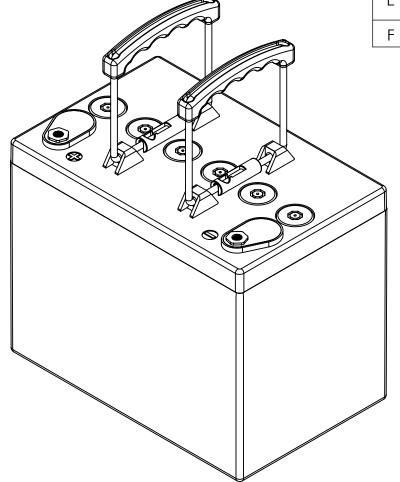

ISOMETRIC VIEW

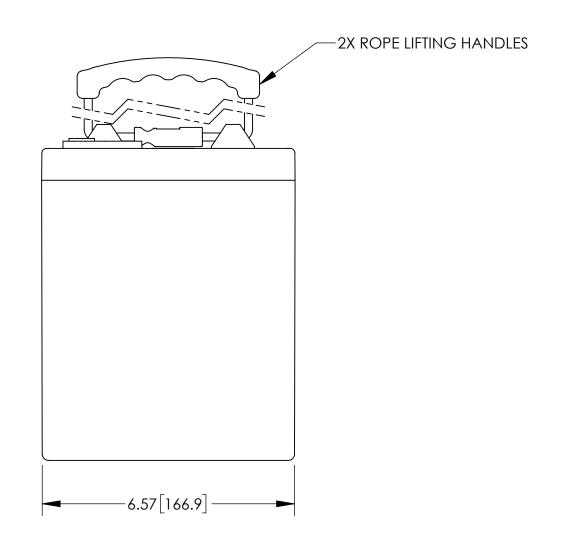

ENVELOPE DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/32 ,XX ± ,12 ±1°		TRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790						
		APPROVALS DATE		DATE	BATTERY, 12 VOLT,					
.XXX ± .060	= **	DRAWN	ELH	3/01/00	AGM-1280T SERIES					
TREATMENT NONE		CHECKED	S. VALDEZ	3/01/00						
FINISH NONE		APPROVED	JBT	3/04/00	SIZE CA	GE CODE 630	017	DWG NO.	SM-1280T	FEV
SIMILAR TO CALC WT		ISSUED	DH	11/17/21	SCALE	1:2.5			SHEET 1 OF	1